


PARÁMETROS DE BLOWER´S DE CANAL LATERAL

MOTOR TRIFÁSICO

No. Modelo	Motor					Peso Aproximado	Nivel de Ruido	Caudal de Aire máximo	Vacío	Presión Máxima	Valvula de alivio de presión
	Frecuencia	Nominal									Número x tipo
		Potencia	Voltage	Corriente							
Hz	kW	HP	V	A	kg	dB (A)	m³/h	mbar	mbar		
2G H610-H16	60	2.55	3.4	220	10.3	26	72	330	-245	230	1 x 2BX2 114/ 146
2G H630-H26	60	3.45	4.6	220	12.04	35	73	410	-210	220	1 x 2BX2 114/ 146
2G H720-H37	60	4.8	6.4	220	10.4 A /6.0Y	54	76	380	-330	280	1 x 2BX2 114/ 146
2G H720-H47	60	6.3	8.4	220	12.3 A /7.1Y	65	76	380	-440	440	1 x 2BX2 114/ 146
2G H720-H57	60	8.6	11.5	220	16.7 A /9.64Y	73	76	380	-440	670	1 x 2BX2 114/ 146
2G H840-H27	60	8.6	11.5	220	16.7 Δ /9.64Y	91	78	1050	-150	120	1 x 2BX4 744/ 844
2G H930-H07	60	9.8	13.1	220	19.1 A /11.03Y	104	80	1550	-80	70	2 x 2BX4 754/ .. 864

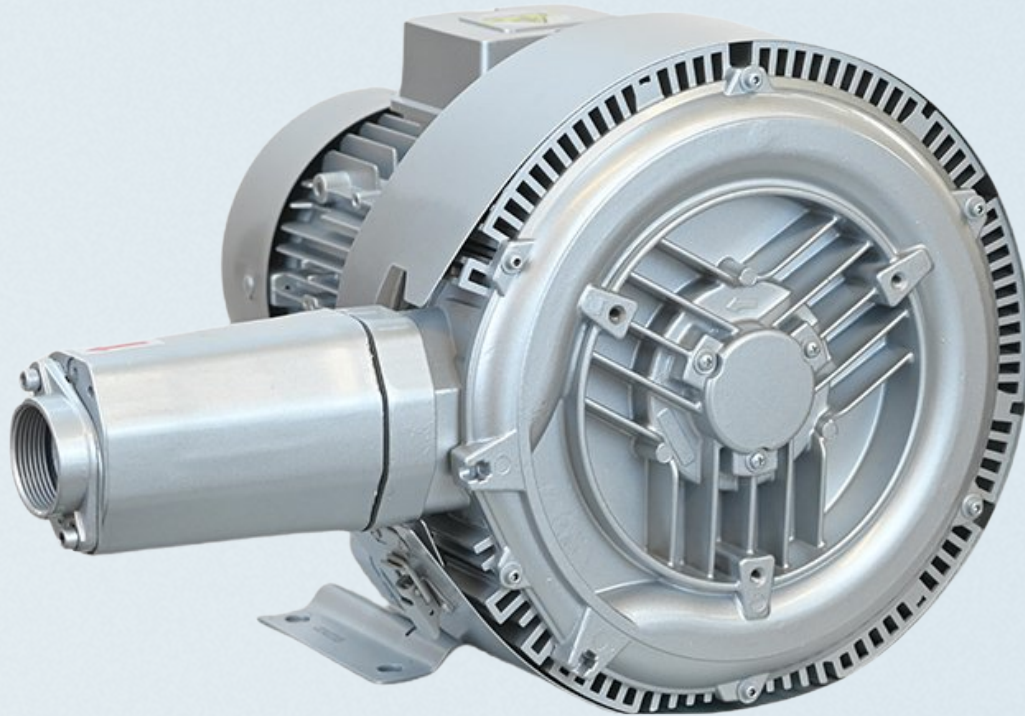

MOTOR MONOFÁSICO

No. Modelo	Motor					Peso Aproximado	Nivel de Ruido	Caudal de Aire máximo	Vacío	Presión Máxima	Valvula de alivio de presión
	Frecuencia	Nominal			Número x tipo						
		Potencia	Voltage	Corriente							
		Hz	kW	HP							V
2G H310-A11	60	0.8	1	110	5.7	14	57	130	-150	160	1 x 2BX2 114/ 142
2G H320-H36	60	1.5	2	110	6.0 A /3.5Y	18	60	130	-300	400	1 x 2BX2 114/ 142

